



P:\Engineering\Motive Power and Equipment\2. Passenger\Passenger Equipment Rehab\2022 Projects\ARR 352 Interior Refresh\ARR 352 Proposed Arrangement.dwg

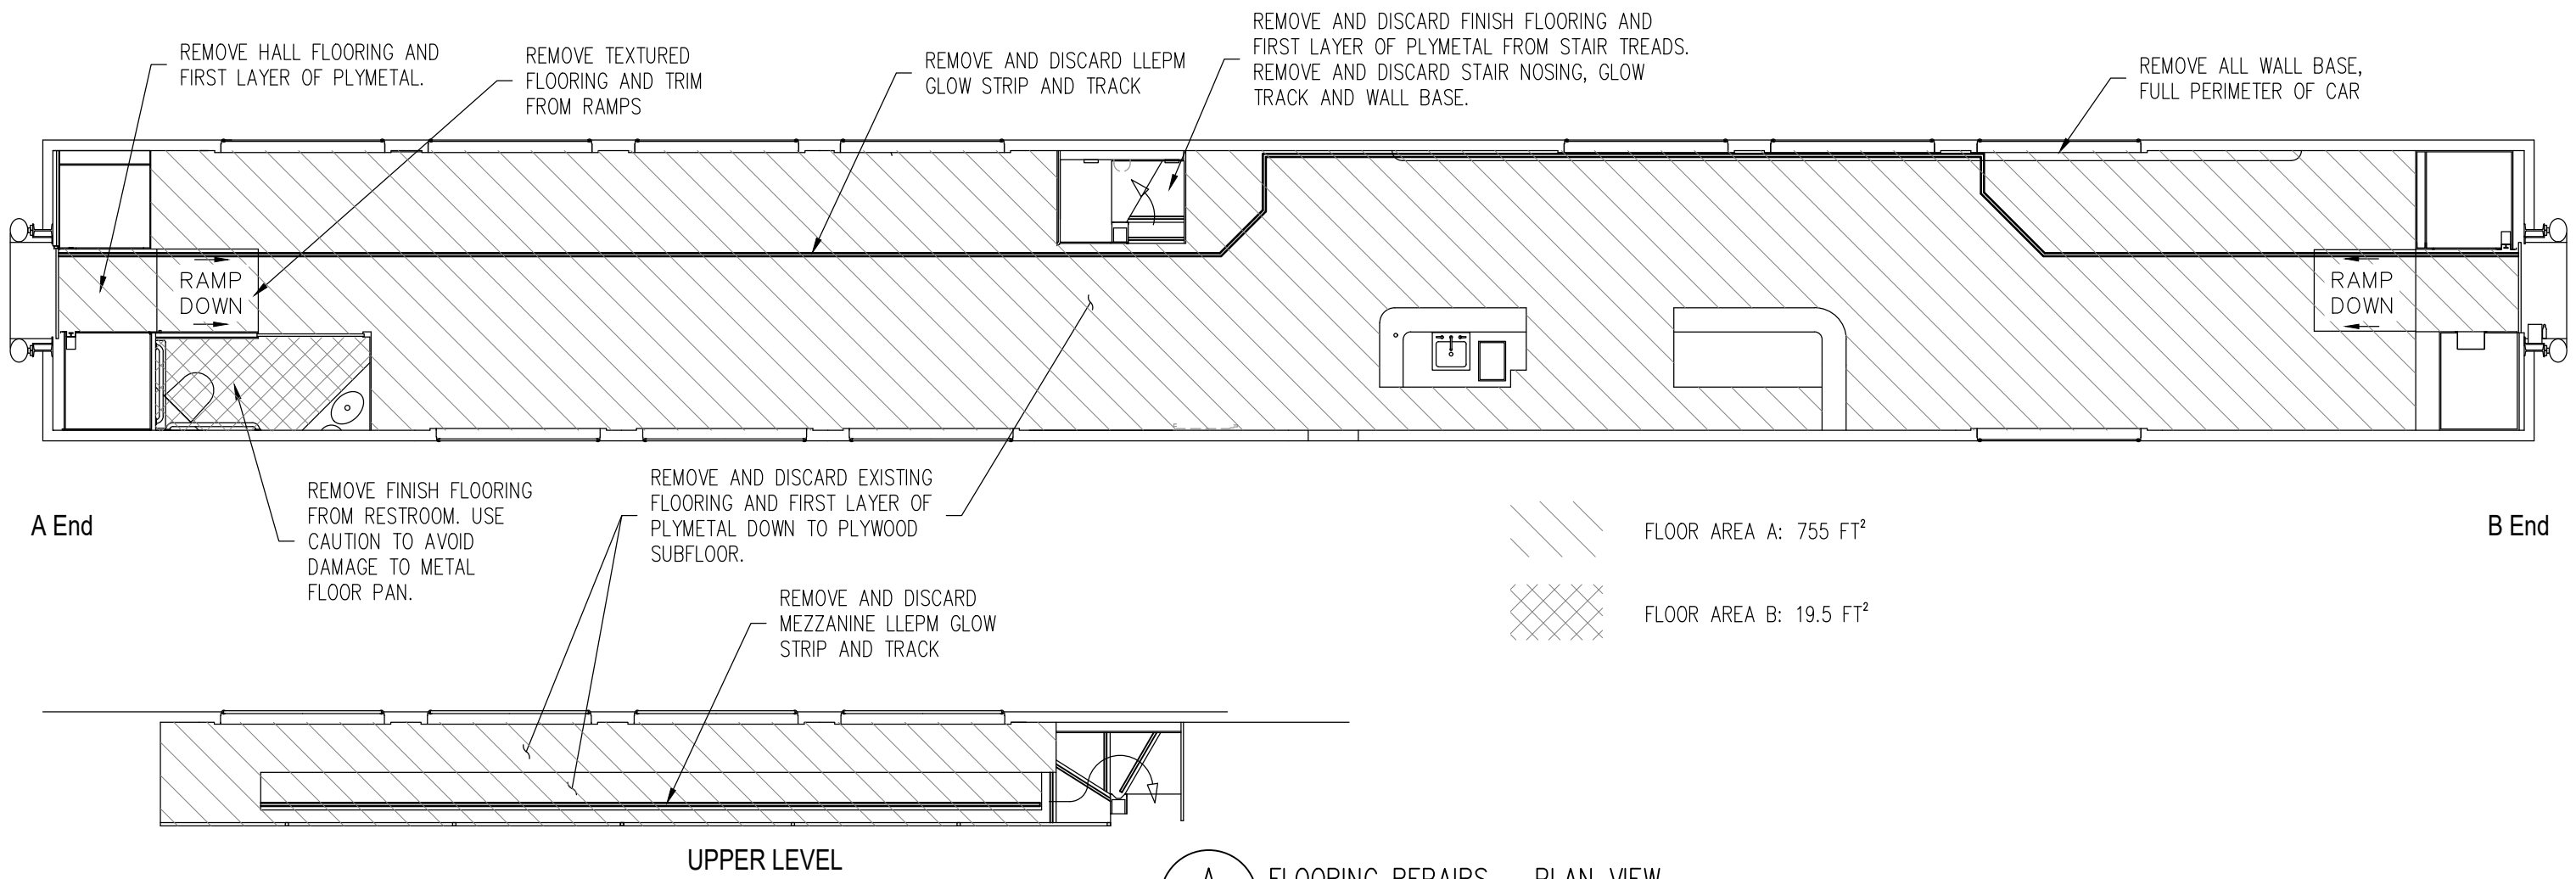


A
1 FLOORING REPAIRS – PLAN VIEW
SCALE: NTS

- NOTES:
1. FLOOR AREA A (MAIN LEVEL, MEZZANINE FLOOR AND STAIRS)
 - 1.1. REMOVE EXISTING FLOORING AND TOP PLY-METAL LAYER TO WOODEN SUBFLOOR, FULL WIDTH OF RAILCAR. TRIM EXISTING FLOORING AND TOP PLYMETAL LAYER WITHIN 1/2" OF BULKHEADS AND PARTITIONS. VENTILATE ALL SURFACES UNTIL DRY.
 - 1.2. CUT OUT AND REPLACE ANY DECAYED OR DAMAGED PLYWOOD SUBFLOOR WITH 3/4" THICK APA B-D SANDED, GROUP 2, EXPOSURE 1 PLYWOOD PATCH.
 - 1.3. SATURATE ALL PLYWOOD SURFACES WITH RESIN/ACETONE SOLUTION.
 - 1.4. MASK OFF AND PROTECT IMBEDS AND HARDWARE WHICH IS UNABLE TO BE REMOVED.
 - 1.5. LAMINATE PLYWOOD SURFACES WITH ONE LAYER 1 1/2 OZ CHOPPED STRAND MAT AND POLYESTER RESIN
 2. FLOOR AREA B (RESTROOM)
 - 2.1. REMOVE EXISTING FINISH FLOORING IN RESTROOM TO METAL FLOOR PAN (TOILET REMOVED BY ARRC). METAL FLOOR PAN TO REMAIN INTACT.
 3. ALL AREAS:
 - 3.1. CORRECT ANY DEVIATIONS IN LAMINATED AREAS TO A FLATNESS OF 3/16" IN 10' USING POLYESTER BASED FILLER (EVERCOAT OR SIMILAR), APPLY TOPCOAT AND SAND SMOOTH FOR APPLICATION OF INDUSTRIAL RUBBER FLOORING.
 - 3.2. CLEAN WORK AREA FOR APPLICATION OF FLOORING BY OTHERS.

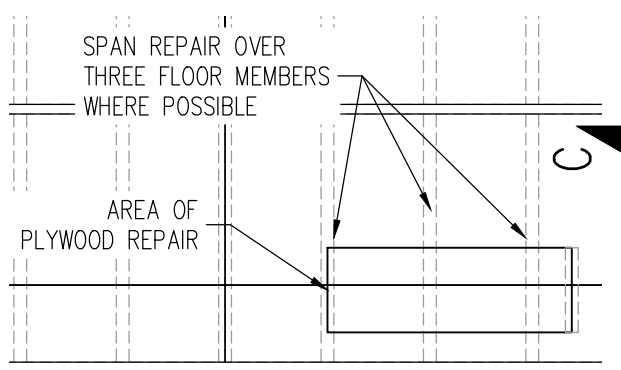

B
1 TYPICAL SUBFLOOR REPAIR
SCALE: NTS

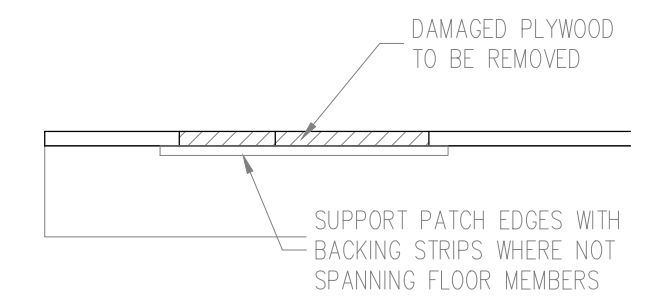

C
1 TYPICAL SUBFLOOR REPAIR SECTION
SCALE: NTS

ALASKA RAILROAD CORPORATION ENGINEERING SERVICES P.O. BOX 107500, ANCHORAGE, ALASKA 99510-7500		
PROJECT : MOTIVE POWER AND EQUIPMENT PASSENGER EQUIPMENT		
TITLE: ARR 352 INTERIOR REFURBISHMENT FLOOR REPAIR		
DESIGNED BY: CDL	SCALE : NTS	AFE NO.: 10970 2022 FTA
DRAWN BY: CDL	DATE : OCTOBER 2022	ACAD FILE:
CHECKED BY: ARRC		DWG NO.
APPROVED BY: ARRC		1 OF 1